




Ideal for industrial settings, AGB and AGF bench and floor scales feature a stainless steel indicator and sturdy construction, and are available in three platform sizes and a wide selection of capacities. Accomplish weighing and counting tasks quickly, as results are readily visible on the backlit LCD, which offers 40mm-high-digits. AGB and AGF scales expedite checkweighing with a large, backlit display that changes colour to show if the weight is over, under or within the set limit. For maximum efficiency, a tactile keypad offers smooth operation. With an internal rechargeable battery, the AGB/AGF can be used in locations where power is unavailable. Swiftly transmit results to computers or printers using the RS-232 interface. The scales feature external calibration, so verification and adjustments can be performed using weights. EC type approval means the AGB and AGF are suitable for use in legal for trade applications.

**Backlit LCD with sizeable digits means results are easy to read, speeding up weighing tasks**

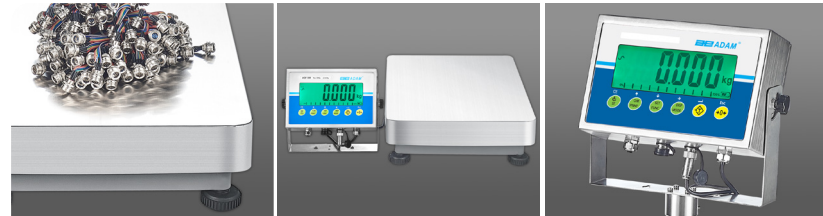

## Features

- Backlit display changes colour for quick notification of checkweighing limits
- Colour-coded keys facilitate quick recognition of the most frequently used buttons
- Heavy-duty rubber feet ensure stability of unit
- Large, grade 304 stainless steel pan allows easy cleaning
- Rugged construction stands up to industrial use
- RS-232 interface is available to provide speedy connection to computers and printers
- External calibration allows for verification and adjustment with weights
- Hold function freezes the displayed weight, allowing time to elapse without losing the result
- Checkweighing with audible alarm
- Parts counting with preset sample sizes
- Selectable digital filtering for animal/dynamic weighing enables consistent results for moving subjects
- EC type approved
- Rechargeable battery included for operation almost anywhere
- Programmable auto power-off to save energy

## Applications

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Check counting
- Display hold
- Peak hold
- Dynamic / animal weighing
- Net/gross

## About ADAM:

For more than 45 years, professionals worldwide have relied on Adam Equipment for an extensive selection of dependable and affordable weighing equipment. Adam provides the right balance of speed, performance and value.

Model	AGB 8	AGB 16	AGB 35	AGB 70	AGF 150	AGF 300	AGF 600	AGB 6M	AGB 15M	AGB 30M	AGB 60M	AGF 60M	AGF 150M	AGF 300M
<b>Capacity</b>	8kg	16kg	35kg	70kg	150kg	300kg	600kg	6kg	15kg	30kg	60kg	60kg	150kg	300kg
<b>Readability</b>	0.1g	0.2g	0.5g	1g	5g	10g	20g	2g	5g	10g	20g	20g	50g	100g
<b>Repeatability (S.D.)</b>	0.1g	0.2g	0.5g	1g	5g	10g	20g	2g	5g	10g	20g	20g	50g	100g
<b>Linearity (+/-)</b>	0.2g	0.4g	1g	2g	10g	20g	40g	4g	10g	20g	40g	40g	100g	200g
<b>Pan Size</b>	300x400mm			400x500mm			600x800mm	300x400mm			400x500mm		600x800mm	
<b>Weighing units</b>	g, kg, N, lb, lb:oz, oz, custom unit							g, kg						
<b>Stabilisation Time (sec)</b>	2													
<b>Interface</b>	RS-232													
<b>Calibration</b>	External calibration													
<b>Display</b>	Backlit LCD with 40mm -high digits													
<b>Power Supply</b>	Mains power cord / Internal rechargeable battery													
<b>Operating Temperature</b>	-10° to 40°C													
<b>Housing</b>	Stainless steel indicator with die-cast aluminum base													
<b>Overall Dim.</b>	520x300x665mm (wxdxh)				625x400x855mm (wxdxh)		661x1286x-210mm (wxdxh)	935x600x880mm (wxdxh)			625x400x855mm (wxdxh)		935x600x-880mm (wxdxh)	
<b>Net Weight</b>	14kg				18kg		35kg	14kg			18kg		35kg	
<b>Approvals</b>	N/A							EC type approved						

## Accessories

Item number	Description
700400103	RS-232 cable
1120011156	ATP thermal printer
3074010507	RS-232 to USB adapter (must order corresponding RS-232 cable)
1100011297	Relay box
600002028	AdamDU Data Collection Program
700660290	Calibration certificate
3004013214	Light tower and relay kit
1120014641	AIP impact printer

## Key Accessories



**ATP thermal printer**  
Easy-to-use features combined with quick set-up equals a truly versatile thermal printer. A single push-button feed key and three easy-to-read LED indicators make operation simple.



**Relay Box**  
The relay box is connected by wire to the scale, and helps transmit signals to other devices.

Supplied by