




W-LITE

WEICOMP Lite Series bench scale

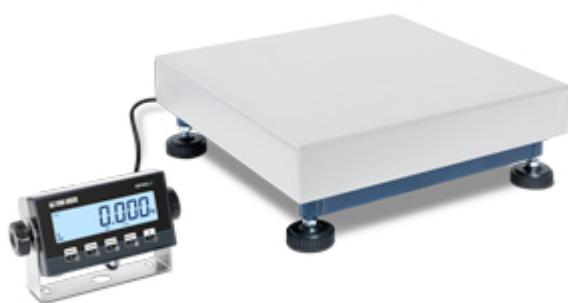

Compact and versatile bench scale for industry and commercial use.

- Reliable, accurate, and designed for everyday use, our single-cell bench scale is the ideal solution for small and medium-capacity applications. Built with a sturdy painted steel structure and a stainless steel top plate, it guarantees durability and resistance to stress. The aluminum load cell, with IP65 protection, ensures consistent performance.

WEICOMP

Working in cooperation with:

BLAKE & BOUGHTON LTD

UNITS 8 & 10 ROMAN WAY, THETFORD - IP24 1XB - NORFOLK
Tel. +44 (0) 1842 751555 Fax. +44 (0) 1842 755577
sales@blakeandboughton.co.uk

**The best solution
for advanced industrial
applications**

- Equipped with a 5-button multifunction weight indicator in ABS, with 230VAC power supply and integrated rechargeable NiMH battery, it offers maximum flexibility of use. Belonging to accuracy class C3, this scale is recommended for industrial and commercial applications that require reliability and precision in every weighing.

TECHNICAL FEATURES - PLATFORM

- Sturdy structure in blue painted steel.
- AISI 304 stainless steel top plate with satin finish.
- Loadcell overload protection stops.
- Aluminum load cell with IP65 protection.
- Adjustable feet.
- Level bubble integrated into the structure.
- OIML R60 class C3 approval (optional).

MAIN FUNCTIONS

- Conversion of weight into lb, or with freely programmable conversion factor.
- Totalization.
- Formulation.
- Automatic tare.
- Animal weighing.

OPTIONS

- Stainless steel column, available heights 350 / 500 / 700 mm.
- Roller unit.
- Calibration certificate.
- 3000e approvals.
- Alibi memory.

TECHNICAL FEATURES - WEIGHT INDICATOR

- ABS casing, easy to clean and resistant.
- Backlit 25mm LCD display with 6 digits, high contrast and icons for active function indication.
- Functional waterproof 5-key keyboard.
- Adjustable tilt support bracket for bench and wall mounting.
- Suitable for use on a bench, column, or wall.
- 24-bit A/D converter, 4 channels, max. 200 conv./sec. and up to 8 signal linearization points.
- RS232 (RJ11 port) for thermal printer, repeater, or PC communication.
- Load cell connection to the weight indicator via 6-pin connector.
- Internal power supply 110 / 240 VAC, with EU or UK plugs.
- Integrated rechargeable NiMH battery, with approx. 40 hours of autonomy.

DETAIL 1

Optional column

DETAIL 2

Optional column

DETAIL 3

Optional column

VERSIONS

Available versions

Code	I x w x h (mm)	Max (kg)	d (g)	M (g)*	Notes
W33-6	300x300x130	6	2	2	
W33-15	300x300x130	15	5	5	
W33-30	300x300x130	30	10	10	
W44-30	400x400x140	30	10	10	
W44-60	400x400x140	60	20	20	
W44-150	400x400x140	150	50	50	
W45-30	400x500x140	30	10	10	
W45-60	400x500x140	60	20	20	
W45-150	400x500x140	150	50	50	
W66-60	600x600x165	60	20	20	
W66-150	600x600x165	150	50	50	
W66-300	600x600x165	300	100	100	
W33-6-UK	300x300x130	6	2	2	UK PLUG
W33-15-UK	300x300x130	15	5	5	UK PLUG
W33-30-UK	300x300x130	30	10	10	UK PLUG
W44-30-UK	400x400x140	30	10	10	UK PLUG
W44-60-UK	400x400x140	60	20	20	UK PLUG
W44-150-UK	400x400x140	150	50	50	UK PLUG
W45-30-UK	400x500x140	30	10	10	UK PLUG
W45-60-UK	400x500x140	60	20	20	UK PLUG
W45-150-UK	400x500x140	150	50	50	UK PLUG
W66-60-UK	600x600x165	60	20	20	UK PLUG
W66-150-UK	600x600x165	150	50	50	UK PLUG
W66-300-UK	600x600x165	300	100	100	UK PLUG

(*) Divisions obtainable only with the relative options



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,,

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



A RICE LAKE WEIGHING SYSTEMS COMPANY

COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

BLAKE & BOUGHTON LTD

UNITS 8 & 10 ROMAN WAY, THETFORD - IP24 1XB - NORFOLK

Tel. +44 (0) 1842 751555 Fax. +44 (0) 1842 755577

sales@blakeandboughton.co.uk

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.